

DATASHEET

ALTAIR HANDHELD PROGRAMMING UNIT

ALPU1000

The ALPU1000 handheld programming unit allows you to set all of the programmable variables from the Altair device range including the loop address, read the analogue value from a device or change the heat detector setting from rate of rise to high temperature.

When used with the connection lead you can program/read in information from call points and sounders adding loop addresses or program one of the sounder's 32 operating modes.




KEY FEATURES

- Easy to use
- Clear device display
- Auto shut-off to save battery
- Displays the sensor analogue values
- Includes the programming cables for backward compatibility
- 5 year product warranty

TECHNICAL SPECIFICATION

Operating supply battery specification	6LR61 type, 9 V
Operating temperature range	from -30°C to +70°C
Maximum tolerated relative humidity	95% RH (no condensation)
Weight	200 grams

TECHNICAL INFORMATION

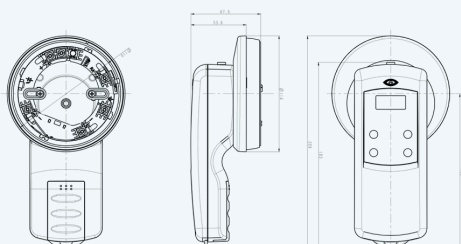

Argus Security S.r.l.

Via del Canneto, 14 – Località Vignano Z.I.
Valle delle Noghère
34015 Muggia (TS) Italy

T: +39-040.23.96.411
E: info@argussecurity.it
www.argussecurity.it